

Kanlux

**Kanlux MAH
MAX LED
hermetic
luminaires**





Kanlux

**HIGH CLASS
OF TIGHTNESS**

**IP
65**

**HIGH
RESISTANCE
TO MECHANICAL
DAMAGE**

IK08

Kanlux

Kanlux MAH MAX LED

160 lm/W luminous efficacy

5
WARRANTY
5 years

5-year warranty*



durability of **50 000h**






*under the terms of the warranty statement
available on the website,

Kanlux

Proven solutions:

- easy installation using mounting brackets
- easy installation using mounting brackets



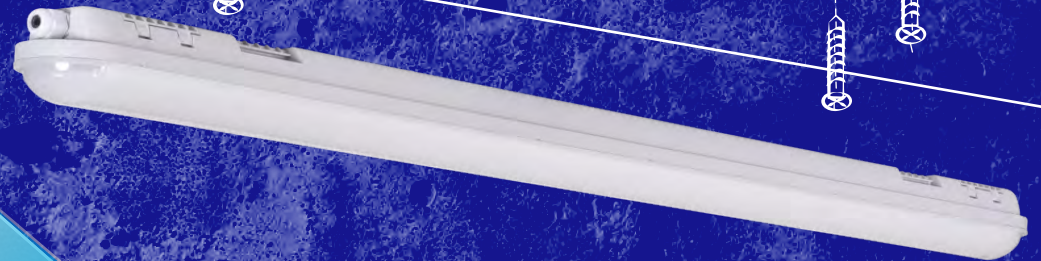
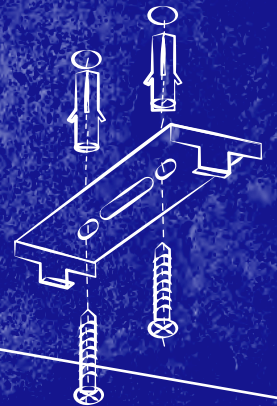
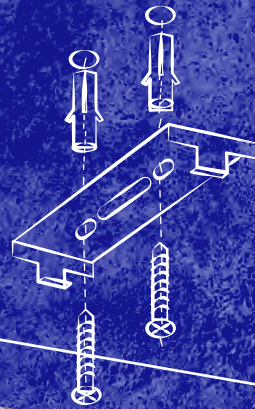


Kanlux

Possibility of fixture-loop-through connection



double cable gland

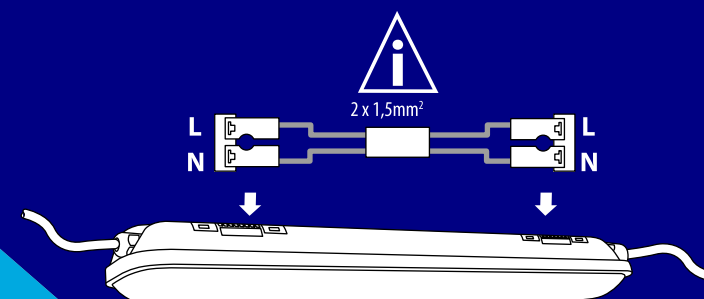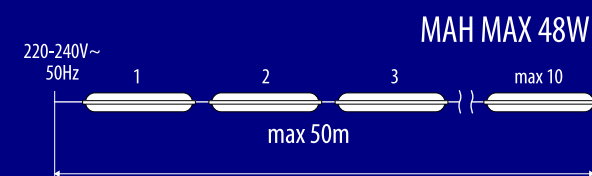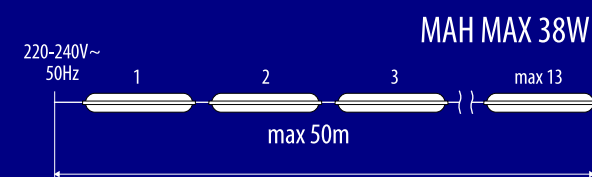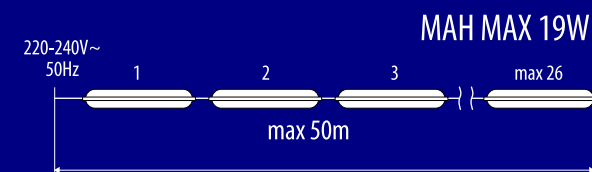

Kanlux



Three variants to choose from

38463

MAH MAX 19W 06 NW RYF



575mm - 19W - 3050lm

38464

MAH MAX 38W 12 NW RYF



1175mm - 38W - 6080lm

38465

MAH MAX 48W 15 NW RYF



1475mm - 48W - 7680lm

Technical parameters:

power supply: 220-240V; ~ 50 Hz

power supply: **19W, 38W, 48W**

protection class: **IP65**

mechanical strength: **IK08**

luminous efficacy: **160lm/W**

colour temp: **4000K**

durability: **50000h**

grooved lampshade

Kanlux



Application:
MAH MAX LED is a family of HERMETIC luminaires. This type of luminaires is mainly used in parking lots, industrial spaces, garages, basements, warehouses, halls, etc.

Kanlux



Kanlux

Kanlux MAH MAX LED



Well packed